

МОТОР-РЕДУКТОРЫ ЦИЛИНДРИЧЕСКИЕ


Тип 1МЦ2С (4МЦ2С)

Основные технические характеристики мотор-редукторов МЦ2С


Частота вращения выходного вала, об/мин	1МЦ2С-63		1МЦ2С-80		1МЦ2С-100		1МЦ2С-125	
	Мкр, Н.м	Мощность эл/дв, кВт	Мкр, Н.м	Мощност ь эл/дв, кВт	Мкр, Н.м	Мощность эл/дв, кВт	Мкр, Н.м	Мощность эл/дв, кВт
28	по индивидуальному заказу		253	0,75	506	1,5	1012	3,0
			371	1,1	742	2,2	1350	4,0
35,5	146	0,55	293	1,1	585	2,2	1065	4,0
	200	0,75	399	1,5	798	3,0	1464	5,5
45	115	0,55	231	1,1	462	2,2	840	4,0
	157	0,75	315	1,5	630	3,0	1155	5,5
56	127	0,75	253	1,5	506	3,0	928	5,5
	186	1,1	371	2,2	675	4,0	1265	7,5
71	100	0,75	293	2,2	532	4,0	998	7,5
	146	1,1	399	3,0	732	5,5	1464	11,0
90	115	1,1	231	2,2	420	4,0	787	7,5
	157	1,5	315	3,0	577	5,5	1155	11,0
112	127	1,5	253	3,0	464	5,5	928	11,0
	186	2,2	337	4,0	633	7,5	1265	15,0
140	148	2,2	270	4,0	506	7,5	1012	15,0
	202	3,0	371	5,5			1248	18,5
180	115	2,2	210	4,0	по индивидуальному заказу		787	15,0
	157	3,0	289	5,5			971	18,5

Конструктивное исполнение по способу монтажа


G 110




G 120




G 150




G 160




G 310




G 320




G 350



G 360



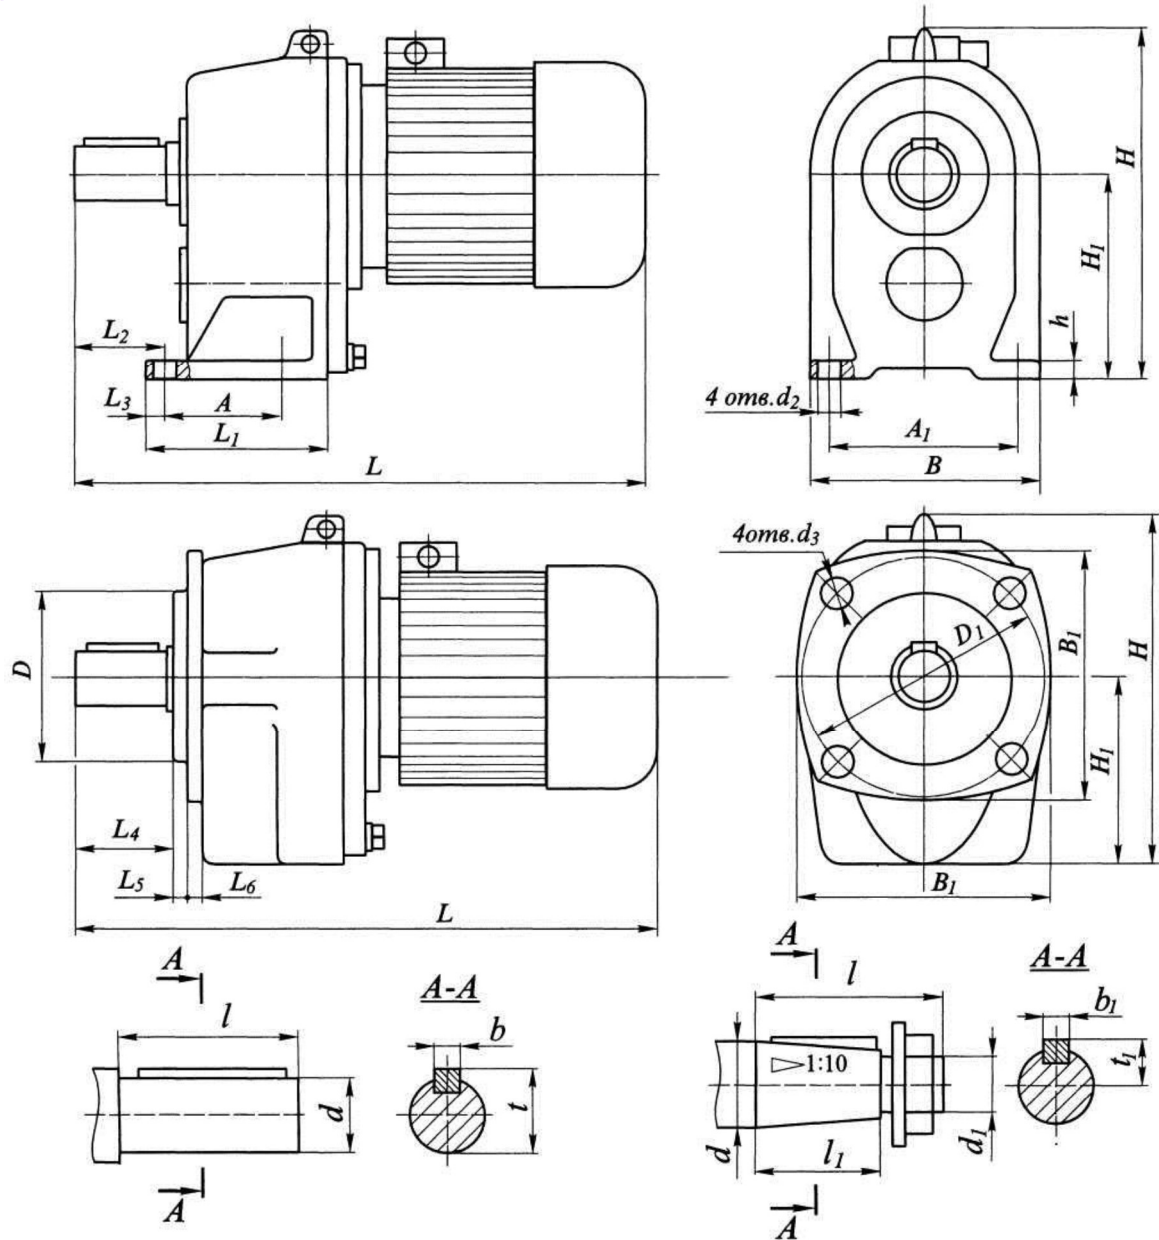

Габаритные и присоединительные размеры мотор-редукторов МЦ2С

Обозначение мотор- редуктора	A	A ₁	B	B ₁	D	D ₁	H	L	H ₁	L ₁	L ₂	L ₃	L ₄
							не более						
1МЦ2С-63	110	150	185	230	180	215	288	544	140	160	48	15	65
1МЦ2С-80	115	180	225	250	200	240	333	624	170	175	75	22	82
1МЦ2С-100	130	210	255	270	230	275	400	700	212	195	102	20	120
1МЦ2С-125	160	280	335	360	300	350	530	913	265	235	105	25	120

Обозначение мотор- редуктора	L ₅	L ₆	h	d	d ₁	d ₂	d ₃	l	l ₁	b	b ₁	t	t ₁
1МЦ2С-63	7	12	16	28	M16	12	14	60	42	8	5	31	14,95
1МЦ2С-80	7	14	18	35	M20	15	14	80	58	10	6	38	18,55
1МЦ2С-100	5	15	22	45	-	15	14	110	-	14	-	49	-
1МЦ2С-125	5	20	28	55	M36	19	18	110	82	16	14	59	28,95