




Структура условного обозначения комбинированного мотор-редуктора

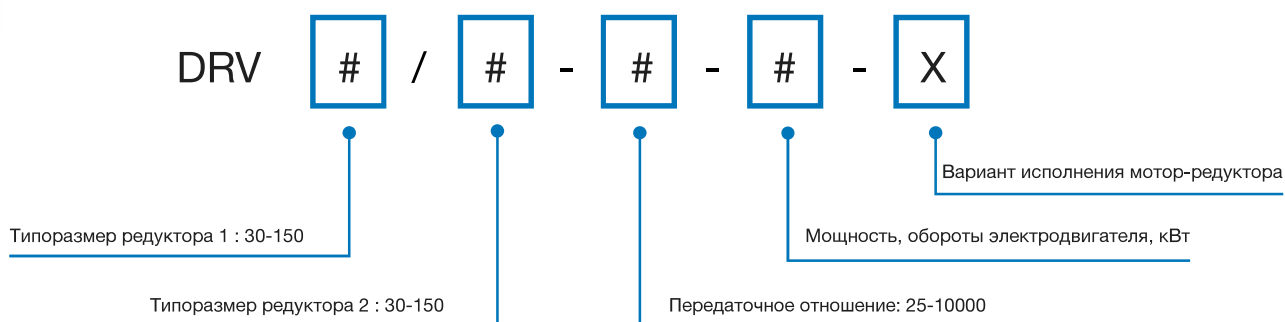

Варианты комплектации редукторов DRV




DRV




DRV F

Монтажное исполнение DRV


AS1




AS2




VS1




VS2




PS1




PS2




BS1




BS2



Габаритно-присоединительные размеры DRV

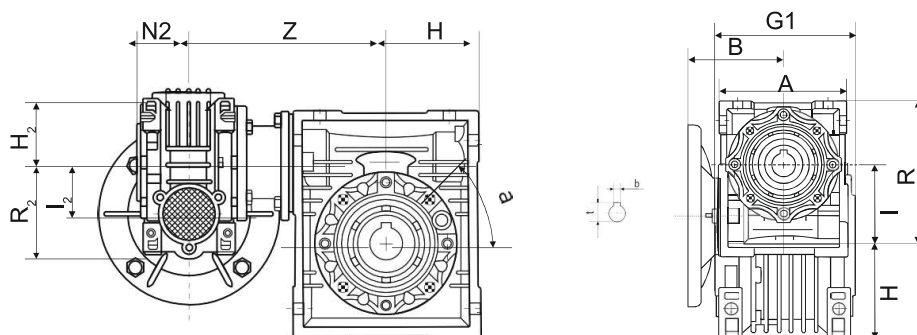

DRV	A	B	G1	H	I	R	H2	I2	N2	R2	Z	K _н
025/030	54	—	63	40	30	—	—	—	22,5	—	100	—
030/040	80	55	78	50	40	71,5	40	30	29	57	122	3,5
030/050	80	55	92	60	50	84	40	30	29	57	132	4,7
030/063	80	55	112	72	63	102	40	30	29	57	145	7,4
040/050	100	70	92	60	50	84	50	40	36,5	71,5	140,5	5,8
040/063	100	70	112	72	63	102	50	40	36,5	71,5	156,5	8,5
040/075	100	70	120	86	75	119	50	40	36,5	71,5	167,5	11,3
040/090	100	70	140	103	90	135	50	40	36,5	71,5	184,5	15,3
050/075	120	80	120	86	75	119	60	50	43,5	84	188	12,5
050/090	120	80	140	103	90	135	60	50	43,5	84	205	16,5
050/110	120	80	155	127,5	110	167,5	60	50	43,5	84	226	38,5
063/075	144	95	120	86	75	119	72	63	53	102	188	15,2
063/090	144	95	140	103	90	135	72	63	53	102	205	19,2
063/110	144	95	160	127,5	110	167,5	72	63	53	102	225	41,2
063/130	144	95	170	147,5	130	187,5	72	63	53	102	245	54,2
063/150	144	95	200	170	150	230	72	63	53	102	275	90,2

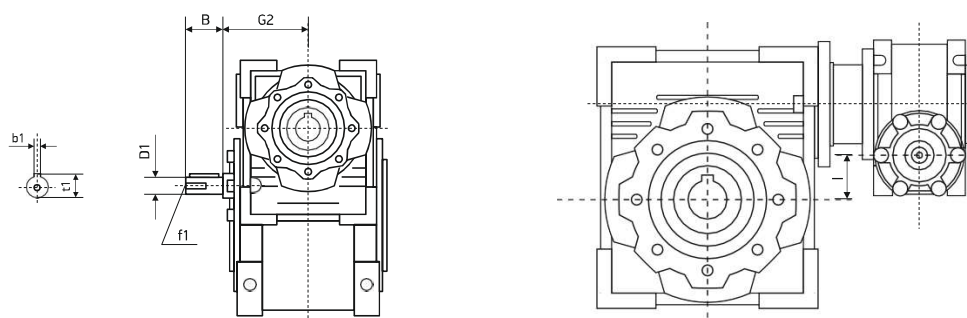

DRV	030/040	030/050	030/063	040/075	040/090	050/090	050/110	063/110	063/130	063/150
B1	54	—	63	40	30	—	—	—	22,5	—
D1	80	55	78	50	40	71,5	40	30	29	57
G2	80	55	92	60	50	84	40	30	29	57
I	80	55	112	72	63	102	40	30	29	57
b1	100	70	92	60	50	84	50	40	36,5	71,5
f1	100	70	112	72	63	102	50	40	36,5	71,5
T1	100	70	120	86	75	119	50	40	36,5	71,5

Мощность двигателя, кВт	Частота вращения выходного вала, об/мин	Крутящий момент, Нм	Сервис-фактор	Передаточное число	Тип мотор-редуктора	Двигатель ИЕС	Радиальная нагрузка, Н
0,06	4,7	57	1,3	300	DRV030/040	56A4	3490
	3,5	70	0,9	400			3490
	2,8	96	0,6	500			3490
	2,3	104	0,7	600			3490
	1,9	121	0,6	750			3490
	1,6	139	0,5	900			3490
	1,2	166	0,4	1200			3490
	0,9	196	0,4	1500			3490
	0,8	218	0,3	1800			3490
	0,58	261	0,2	2400			3490
	0,4	300	0,2	3200			3490
	0,4	279	0,1	4000			3490
	0,28	338	0,1	5000			3490
	1,6	141	1	900	DRV030/050	56A4	4840
	1,2	169	0,7	1200			4840
	0,93	199	0	1500			4840
	0,78	222	0,7	1800			4840
	0,6	266	0,5	2400			4840
	0,5	307	0,4	3000			4840
	0,35	288	0,3	4000			4840
	0,29	311	0,3	4800			4840
	0,9	204	1,1	1500	DRV030/063	56A4	6270
	0,78	225	0,9	1800			6270
	0,58	276	0,8	2400			6270
	0,47	319	0,7	3000			6270
	0,35	306	0,6	4000			6270
	0,28	360	0,4	5000			6270
	0,6	330	1,1	2400	DRV040/075	56A4	7380
	0,47	377	0,8	3000			7380
	0,35	355	0,7	4000			7380
	0,28	419	0,5	5000			7380
	0,5	406	1,4	3000	DRV040/090	56A4	8180
	0,35	365	1,3	4000			8180
	0,28	431	1,0	5000			8180
0,09	4,7	88	0,8	300	DRV030/040	56B4	3490
	3,5	107	1,2	400	DRV030/050	56B4	4840
	2,8	123	1	500			4840
	2,3	159	0,9	600			4840
	1,9	185	0,8	750			4840
	1,6	212	0,7	900			4840
	1,6	200	1,0	900	DRV030/063	56B4	6270
	1,2	263	0,9	1200			6270
	0,93	305	0,7	1500			6270
	0,9	360	1,1	1500	DRV040/075	56B4	7380
	0,78	404	1	1800			7380
	0,58	496	0,7	2400			7380
	0,5	609	0,9	3000	DRV040/090	56B4	8180
	0,35	548	0,8	4000			8180
0,12	4,7	119	1,2	300	DRV030/050	63A4	4840
	3,5	142	0,9	400			4840
	2,8	164	0,7	500			4840
	2,8	171	1,3	500	DRV030/063	132M4	6270
	2,3	208	1,1	600			6270
	1,9	241	0,9	750			6270
	1,6	325	1,2	900	DRV040/075	63A4	7380
	1,2	399	0,9	1200			7380
	0,8	547	0,9	1800	DRV040/090	63A4	8180

Мощность двигателя, кВт	Частота вращения выходного вала, об/мин	Крутящий момент, Нм	Сервис-фактор	Передаточное число	Тип мотор-редуктора	Двигатель ИЕС	Радиальная нагрузка, Н
0.12	0.58	695	0.9	2400	DRV040/090	63A4	8180
	0.5	884	1.2	3000	DRV050/110	63A4	10320
	0.35	784	1	4000			10320
	0.28	928	0.8	5000			10320
0.18	3.5	222	1	400	DRV030/063	63B4	6270
	2.8	257	0.8	500	DRV040/075	63A4	6270
	2.3	362	1.1	600			7380
	1.9	435	0.9	750			7380
	1.6	487	0.8	900			7380
	1.2	629	1	1200	DRV040/090	63A4	8180
	0.93	735	0.8	1500	DRV050/110	63B4	8180
	0.8	861	1.5	1800			10320
0.25	0.58	1113	1.1	2400	DRV040/075	71A4	10320
	3.5	336	1.1	400			7380
	2.8	384	0.8	500			7380
	2.3	512	1.2	600			8180
	1.9	598	0.9	750	DRV040/090	71A4	8180
	1.6	667	0.8	900	DRV050/110	71A4	8180
	1.2	943	1.3	1200			10320
	0.93	1064	1.2	1500			10320
	0.78	1195	1.1	1800			10320
	0.6	1624	1.0	2400	DRV063/130	71A4	13500
	0.47	1935	0.8	3000			13500
	0.35	2046	0.6	4000			13500
	0.28	2430	0.5	5000			13500
	0.8	1199	1.8	1800	DRV063/150	71A4	18000
	0.6	1446	1.8	2400			18000
	0.5	1713	1.4	3000			18000
	0.4	2026	0.9	4000			18000
	0.3	2251	0.7	5000			18000
0.37	4.7	405	1	300	DRV040/075	71B4	7380
	3.5	498	0.7	400	DRV040/090	71B4	7380
	4.7	402	1.5	300			8180
	3.5	523	1.2	400			8180
	2.8	611	0.9	500			8180
	2.3	757	0.8	600			8180
	1.9	950	1.3	750	DRV030/063	71B4	10320
	1.6	1079	1.2	900			10320
	1.2	1396	0.8	1200			10320
	0.9	1674	1.1	1500	DRV063/130	71B4	13500
	0.78	1887	0.9	1800			13500
	0.8	1775	1.2	1800	DRV063/150	71B4	18000
	0.6	2141	1.2	2400			18000
	0.5	2535	0.9	3000			18000
0.55	4.7	639	2.0	300	DRV050/110	80A4	10320
	3.5	826	1.4	400			10320
	2.8	984	1.1	500			10320
	2.3	1181	1	600			10320
	1.9	1411	0.9	750			10320
	2.8	996	1.6	500	DRV063/130	80A4	13500
	1.9	1471	1.2	750			13500
	1.2	2132	0.8	1200			13500
	0.8	2638	0.8	1800	DRV063/150	80A4	18000
	0.6	3182	0.8	2400			18000

Мощность двигателя, кВт	Частота вращения выходного вала, об/мин	Крутящий момент, Нм	Сервис-фактор	Передаточное число	Тип мотор-редуктора	Двигатель IEC	Радиальная нагрузка, Н
0.75	4,7	871	1,5	300	DRV050/110	80B4	10320
	3,5	1126	1,1	400			10320
	2,8	1358	1,1	500	DRV063/130	80B4	13500
	2,3	1631	1	600			13500
	1,9	2005	0,9	750			13500
	1,6	2283	0,8	900			13500
	2,8	1291	1,8	500	DRV063/150	80B4	18000
	2,3	1529	1,7	600			18000
	1,9	1783	1,3	750			18000
	1,6	2215	0,9	900			18000
	1,2	2680	1	1200			18000
1.1	4,7	1312	1,3	300	DRV063/130	90S4	13500
	3,5	1671	1	400			13500
	2,8	1991	0,8	500			13500
	9,3	753	3,1	150	DRV063/150	90S4	18000
	7,0	966	2,4	200			18000
	5,6	1175	1,7	250			18000
	4,7	1364	1,7	300			18000
	3,5	1619	1,6	400			18000
	2,8	1893	1,2	500			18000
	2,3	2242	1,2	600			18000
	1,9	2616	0,9	750			18000
1.5	4,7	1789	1	300	DRV063/130	71B4	13500
	3,5	2279	0,7	400			13500
	9,3	1026	2,3	150	DRV063/150	71B4 71B4	18000
	7,0	1317	1,8	200			18000
	5,6	1602	1,3	250			18000
	4,7	1860	1,3	300			18000
	3,5	2208	1,2	400			18000
	2,8	2582	0,9	500			18000
	2,3	3057	0,9	600			18000